

DIXIE CHOPPER®

LIGHT-COMMERCIAL MOWERS

STRYKER *STAND-ON*

MODELS:

2648 26hp, 48" Deck

2654 26hp, 54" Deck



Stryker 2654 shown*

STAND UP FOR SPEED, QUALITY, AND RELIABILITY.


Dixie Chopper is proud to introduce the **Stryker Stand-on** series into our commercial line-up. Our newest mower packs power in a small footprint and features:

- **American Muscle** – The new Vanguard® 810cc series provides power and performance into a heavy-duty 26 horsepower engine.
- **Compact Stand-on Design** – The Stryker's small footprint allows it to maneuver in tight areas and take up less trailer space.
- **Industrial Strength** – Forged from 7-gauge steel and 14-gauge stainless steel, the Stryker is built for the rigors of commercial mowing.
- **Versatile Design** – Flip up the operator platform to use the Stryker as a conventional walk-behind, giving you more mowing options.
- **Deeper Deck** – The large V6 deck features a 7-gauge steel shell and can easily handle large volumes of grass without slowing you down.
- **Built-In Footsteps** – Allows you to shift weight balance for better traction along hillsides.


*Actual production model may vary



Vanguard® Engine – 26 horsepower commercial engine.

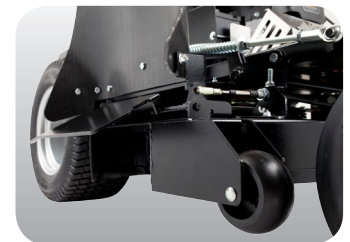

OCDC – Open and close the discharge chute on command.

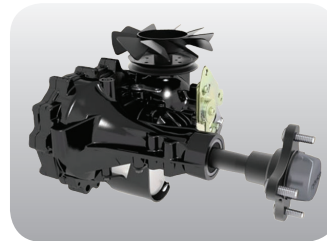

Hydro-Gear® ZT-3400 – Commercial-grade transmission with serviceable filter.



Hillside Footsteps – Keep your balance while accessing hillsides.



48" and 54" V6 Cutting System – Deeper deck for cutting thick grass.

**4 YEAR
BUMPER-TO-BUMPER
WARRANTY***

*up to 500 hour limited warranty

STRYKER *STAND-ON*



	48" Deck	54" Deck
Model	2648	2654
Engine		
Manufacturer	Vanguard®	
Horsepower	26	
Displacement	810cc	
Air-cleaner	2 stage	
Cooling	Air cooled	
Starter	Electric	
Engine warranty	3 Year	

Drive System		
Dual Hydrostatic	Hydro-Gear® ZT-3400	
Ground speed	8 mph	
Parking brake	Integrated in transmission	

Mower Deck		
Deck size	48"	54"
Acres/hour	3.1	3.7
Cutting height	1.5" - 5"	
OCDC (operator controlled discharge chute)	Standard	
Deck height adjustments	Manual lift, 1/4" increments	
Electric lift	Optional	
Deck engagement	Ogura® 150 ft-lbs	
Construction	7 ga formed & welded	
Top plate	7 ga bolted (not welded)	
Blades	3 - 17.875" x 2.5"	3 - 21.375" x 2.5"
Blade tip speed (approximate)	17,875 fpm	17,399 fpm
Spindle housings	1pc keyless sealed cast iron	
Spindles	1.25" Effective diameter machined shaft	
Anti-scalp rollers	4	
Pulleys	Vented split 3/16" steel deep groove	

General		
Battery	12 Volt, 300cca	
Digital display	Tachometer, voltmeter, service alerts	
Fuel capacity	6 gallons	
Rear tires	23 x 9.5-12 Grass Master	23 x 10.5-12 Grass Master
Front tires	15 x 6-8	
Frame	Welded 2" x 2" tube, 7 ga formed	
Operator Platform	Flip-up, steel	
Springer Forks	Optional	

Dimensions		
Overall height	48"	
Overall width (with chute up)	49"	55"
Overall width (with chute)	64"	70"
Overall length	67.5"	
Overall length (platform down)	79"	
Weight	824 lbs	844 lbs

DIXIE CHOPPER®
The World's Fastest Lawn Mower®

6302 E County Road 100 N | Coatesville, IN 46121-9689 | Phone 765.246.7737 | Fax 765.246.6011 | www.dixiechopper.com

Specifications may change as we continuously improve our products. For the latest information and mower specifications, please visit dixiechopper.com or your local Dixie Chopper dealer. Engine horsepower information is provided by the engine manufacturer to be used for comparison only. ©2015 Dixie Chopper. All rights reserved. A division of Jacobsen, A Textron Company.

Part # 700442
REV 01122015